

**Features:**

- ▶ Two thermostats in one unit (NO and NC)
- ▶ Each with wide adjustable temperature range
- ▶ DIN rail mountable



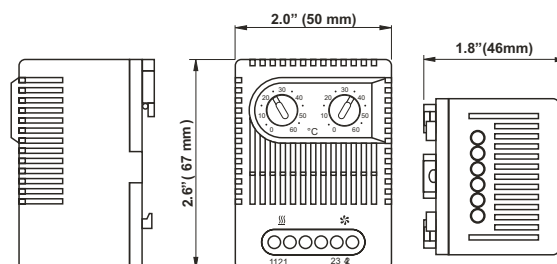
VIPS DTH has two separate thermostats which allows independent control of heating and cooling or other equipments. Dual Thermostat offers varied adjustment ranges and also colour coded for easy function recognition.

**Applications:**

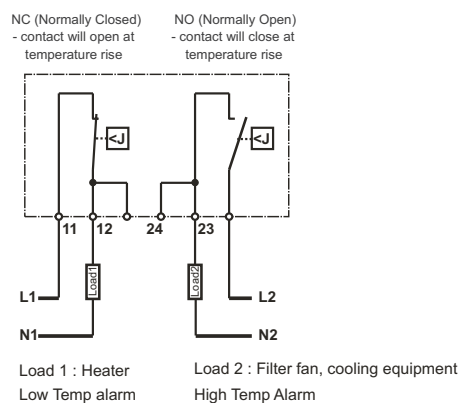
- ▶ Heater
- ▶ Fan
- ▶ Signal devices

**Technical Specifications**

Setting Range	0 to 60°C
Sensor Element	Thermostatic Bimetal
Switching Capacity	NC: 10A resistive/ 2A inductive at 250 VAC NO: 5A resistive/ 2A inductive at 250 VAC
Switching Difference	7 deg +/- 4 deg C
Maximum Tolerance	±10°C

**Dimension****Mechanical Specifications**

Mounting	35 mm DIN Rail
Dimensions	(67x50x46 mm)
Weight	85 g
Connection	Max 2.5 sq.mm cable
Protection Type	IP20

**Connection Diagram****Environmental Specification**

Operating / Storage Temperature	-45 to 70°C
---------------------------------	-------------

**Ordering Information**

Ordering Code	Description
VIPS DTH	Dual Thermostat