



**Features:**

- ▶ ABS plastic moulding
- ▶ Apertures accepting a wide range of bus bar
- ▶ Cts are ultrasonically welded and unbreakable



**Advantages:**

- ▶ Easy bus bar mounting
- ▶ Highly cost effective
- ▶ Compact in size

**Applications:**

- ▶ Switchgear
- ▶ Distribution system
- ▶ Generator sets
- ▶ Control Panels
- ▶ Control Devices
- ▶ Overload protection

**Input Specifications**

Rated Primary Current      50A to 750A  
 Rated Secondary Output      5A/1A (Consult factory)

**Technical Specifications**

Rated Burden                      1.25VA, 2.5VA, 5VA & 10VA  
 Class of Accuracy              1 and 3  
 Thermal Nominal Continuous    1.2 times rated current continuously  
 Rated Current                    2.55x Ith  
 Thermal short circuit current    60xIn  
 Insulation Class                 Class E  
 Max. Operating Voltage        720V maximum  
 Insulation Test Voltage        3KV AC for 1 minute  
 Compliance Standard         VE404 and IEC185


**Environmental Specification**

Operating Temperature        -20°C to 70°C  
 Storage Temperature         0°C to 55°C  
 Humidity                         <95% RH


**Ordering Information**

Ordering Code	Ratio	Class	Burden (VA)
VIPS 3301-50/5-3-1.25	50/5	3	1.25
VIPS 3301-60/5-3-1.25	60/5	1	1.25
VIPS 3301-75/5-3-1.25	75/5	1	1.25
VIPS 3301-80/5-3-1.25	80/5	1	1.25
VIPS 3301-100/5-1-5	100/5	1	5
VIPS 3301-125/5-1-5	125/5	1	5
VIPS 3301-150/5-1-5	150/5	1	5
VIPS 3301-200/5-1-5	200/5	1	5
VIPS 3301-250/5-1-10	250/5	1	10
VIPS 3301-300/5-1-10	300/5	1	10
VIPS 3301-400/5-1-10	400/5	1	10
VIPS 3301-500/5-1-10	500/5	1	10
VIPS 3301-600/5-1-10	600/5	1	10
VIPS 3301-750/5-1-10	750/5	1	10

**Dimensions**

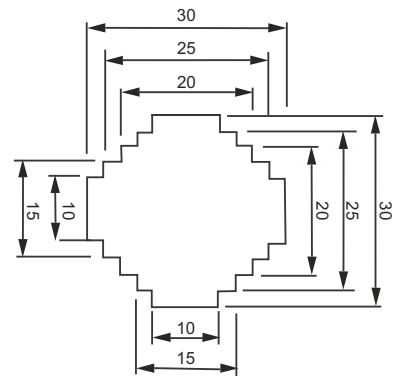

Bus Bar Dimension (mm) : 10 x 30, 15 x 25, 20 x 20

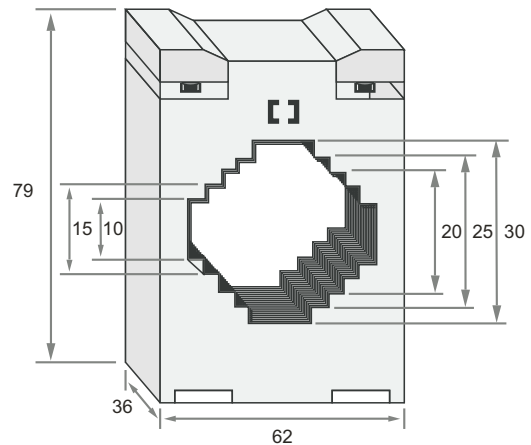

Outer Dimension : 62 x (W) x 79 (H) x 36 (D)