


**Features:**

- ▶ Consistent reliability with high accuracy
- ▶ Time Delay User settable ( 4 Ranges)
- ▶ LED Indication for Power & Relay status
- ▶ ON Delay / Interval user selectable
- ▶ Compact Size

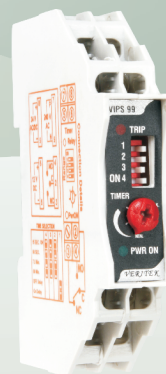

**Advantages:**

- ▶ Automatic compensation for variations
- ▶ Easy adjustment in desired automation
- ▶ Reduction in inventory cost (up to 80%)
- ▶ Easy switching reliability
- ▶ High mechanical endurance of operation ensures trouble free operation

**Applications:**

- ▶ Control panel
- ▶ Feeders / Motors
- ▶ Generator
- ▶ Transformer
- ▶ Electrical distribution

**Input Specifications**

Accuracy	±5% of full Scale
Repeatability	±0.5% or 50 ms
Reset	< 100ms on Interruption of Power

**Output Specification**

Output Contact	SPDT (1 C/O)
Contact Rating	5A/230V AC/28V DC

**Functional Specification**

Time Ranges	0-15 sec 0-60 sec 0-7.5 min 0-60 min
Led Indication	Power & Relay Status

**Supply Voltage**

Auxiliary Supply	230V AC & 24V AC/DC 110V AC & 24V AC/DC
Supply Frequency	50/60 Hz


**Environmental Specifications**

Operating Temperature	-10°C to 55°C
Storage Temperature	-20°C to 75°C
Humidity	< 95% RH (non-condensing)


**Mechanical Specifications**

Weight	65 g
Mounting	DIN Rail (35 mm)/ 2x m4 screw
Dimension	17.5x77x105 mm (WXLXH)


**Dimension**

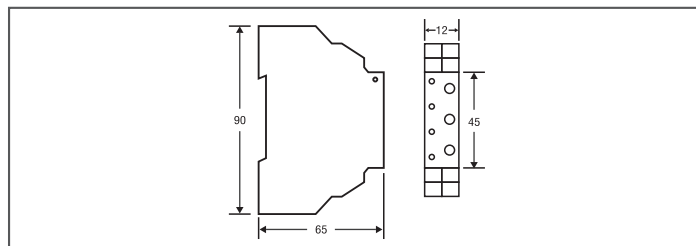

**Order Code**

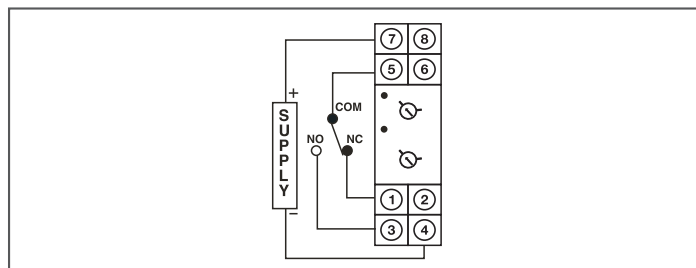

**Timing Diagram**

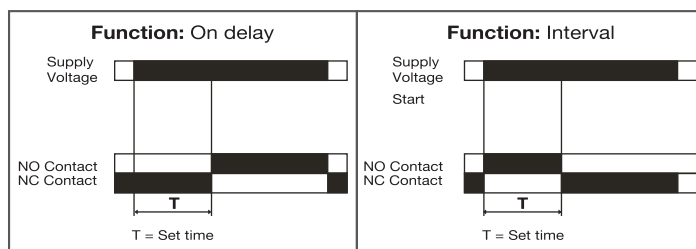

**Ordering Information**

Ordering Code	Description
VIPS 99	Timer