



**Features:**

- ▶ Two thermostats in one unit (NO and NC)
- ▶ Each with wide adjustable temperature range
- ▶ DIN rail mountable



VIPS DTH has two separate thermostats which allows independent control of heating and cooling or other equipments. Dual Thermostat offers varied adjustment ranges and also colour coded for easy function recognition.

**Applications:**

- ▶ Heater
- ▶ Fan
- ▶ Signal devices

**Technical Specifications**

|                      |   |
|----------------------|---|
| Setting Range        | 0 to 60°C   |
| Sensor Element       | Thermostatic Bimetal  |
| Switching Capacity   | NC: 10A resistive/ 2A inductive at 250 VAC<br>NO: 5A resistive/ 2A inductive at 250 VAC |
| Switching Difference | 7 deg +/- 4 deg C   |
| Maximum Tolerance    | ±10°C   |


**Mechanical Specifications**

|                 |                     |
|-----------------|---------------------|
| Mounting        | 35 mm DIN Rail      |
| Dimensions      | (67x50x46 mm)       |
| Weight          | 85 g                |
| Connection      | Max 2.5 sq.mm cable |
| Protection Type | IP20                |


**Environmental Specification**

|                                 |             |
|---------------------------------|-------------|
| Operating / Storage Temperature | -45 to 70°C |
|---------------------------------|-------------|

**Dimension**

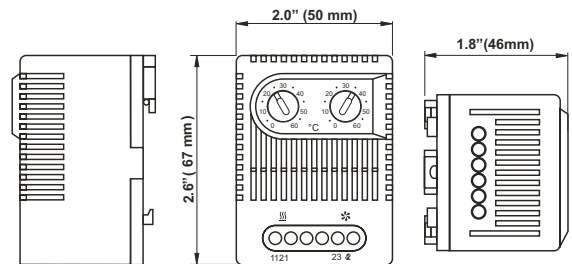

**Connection Diagram**

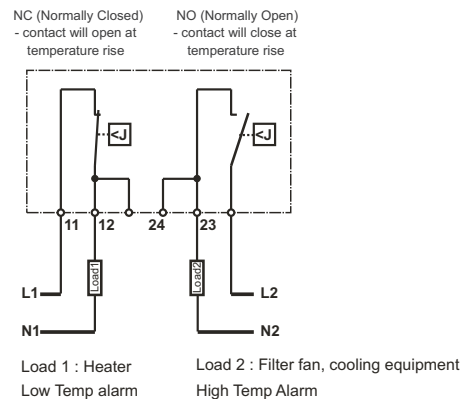

**Ordering Information**

| Ordering Code | Description     |
|---------------|-----------------|
| VIPS DTH      | Dual Thermostat |