

**Features:**

- ▶ ABS plastic moulding
- ▶ Apertures accepting a wide range of bus bar
- ▶ CTs are ultrasonically welded and unbreakable

**Advantages:**

- ▶ Easy bus bar mounting
- ▶ Highly cost effective
- ▶ Compact in size

Applications:

- ▶ Switchgear
- ▶ Distribution system
- ▶ Generator sets
- ▶ Control Panels
- ▶ Control Devices
- ▶ Overload protection

Input Specifications

Rated Primary Current	800A to 5000A
Rated Secondary Output	5A/1A (Consult factory)

Technical Specifications

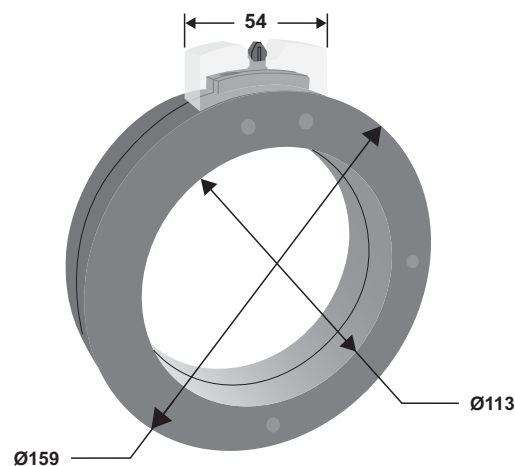
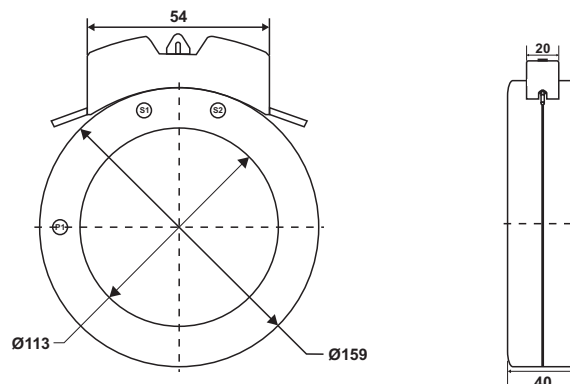
Rated Burden	10VA (any other on request)
Class of Accuracy	1,0.5,0.2s
Thermal Nominal Continuous	1.2 times rated current continuously
Rated Current	2.55x I _{th}
Thermal Short Circuit Current	60xI _n
Insulation Class	Class E
Max. Operating Voltage	720V maximum
Insulation Test Voltage	3KV AC for 1 minute
Compliance Standard	IEC61869-2

Environmental Specification

Operating Temperature	20°C to 70°C
Storage Temperature	0° to 55°C
Humidity	<95% RH

Ordering Information

Ordering Code	Ratio	Class	Burden (VA)
VIPS 11315940-800/5-1-10	800/5	0.5,1	5/10
VIPS 11315940-1000/5-1-10	1000/5	0.5,1	5/10
VIPS 11315940-1200/5-1-10	1200/5	0.5,1	5/10
VIPS 11315940-1600/5-1-10	1600/5	0.5/1	5/10
VIPS 11315940-2000/5-1-15	2000/5	0.5/1	10/15
VIPS 11315940-3200/5-1-30	3200/5	0.5/1	10/30
VIPS 11315940-4000/5-1-45	4000/5	0.5/1	15/45
VIPS 11315940-5000/5-1-45	5000/5	0.5/1	15/45

Dimensions

Outer Dimension : 135 x (W) x 162 (H) x 40 (D)