

Features:

- ▶ ABS plastic moulding
- ▶ Apertures accepting a wide range of bus bar
- ▶ Cts are ultrasonically welded and unbreakable

**Advantages:**

- ▶ Easy bus bar mounting
- ▶ Highly cost effective
- ▶ Compact in size

Applications:

- ▶ Switchgear
- ▶ Distribution system
- ▶ Generator sets
- ▶ Control Panels
- ▶ Control Devices
- ▶ Overload protection

Input Specifications

Rated Primary Current	20A to 600A
Rated Secondary Output	5A/1A (Consult factory)

Technical Specifications


Rated Burden	1.25VA, 2.5VA, 5VA & 10VA
Class of Accuracy	0.2s, 0.5, 1 and 3
Thermal Nominal Continuous	1.2 times rated current continuously
Rated Current	2.55x I _{th}
Thermal short circuit current	60x I _n
Insulation Class	Class E
Max. Operating Voltage	720V maximum
Insulation Test Voltage	3KV AC for 1 minute
Compliance Standard	IEC61869-2

Ordering Information


Ordering Code	Ratio	Class	Burden (VA)
VIPS 3301-20/5-3-1.25	20/5	3	1.25
VIPS 3301-30/5-3-1.25	30/5	3	1.25
VIPS 3301-40/5-3-1.25	40/5	3	1.25
VIPS 3301-50/5-3-1.25	50/5	3	1.25
VIPS 3301-60/5-3-1.25	60/5	1	1.25
VIPS 3301-75/5-3-1.25	75/5	1	1.25
VIPS 3301-80/5-3-1.25	80/5	1	1.25
VIPS 3301-100/5-1-5	100/5	1	5
VIPS 3301-125/5-1-5	125/5	1	5
VIPS 3301-150/5-1-5	150/5	1	5
VIPS 3301-200/5-1-5	200/5	0.2s, 1	2.5/5
VIPS 3301-250/5-1-10	250/5	1	10
VIPS 3301-300/5-1-10	300/5	0.2s/0.5	5/10
VIPS 3301-400/5-1-10	400/5	0.2s/0.5	5/10
VIPS 3301-500/5-1-10	500/5	0.2s/0.5	5/10
VIPS 3301-600/5-1-10	600/5	0.2s/0.5	5/10

Environmental Specification

Operating Temperature	-20°C to 70°C
Storage Temperature	0°C to 55°C
Humidity	<95% RH

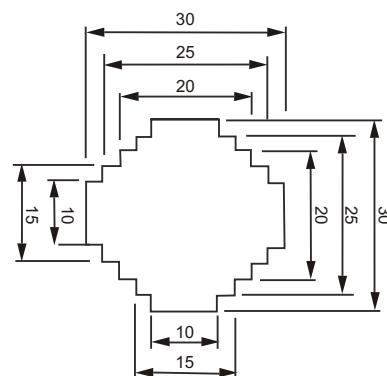Dimensions

Bus Bar Dimension (mm) : 10 x 30, 15 x 25, 20 x 20

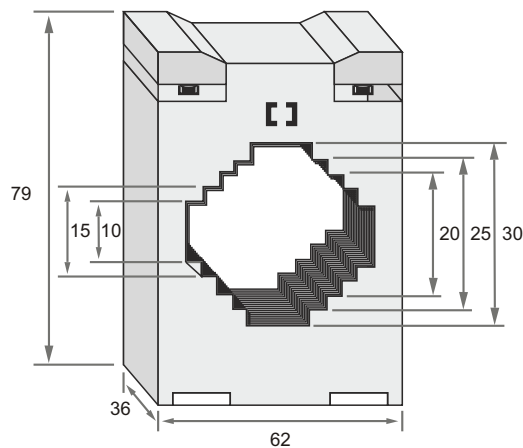

Outer Dimension : 62 x (W) x 79 (H) x 36 (D)