

**Features:**

- ▶ ABS plastic moulding
- ▶ Apertures accepting a wide range of bus bar
- ▶ CTs are ultrasonically welded and unbreakable

**Advantages:**

- ▶ Easy bus bar mounting
- ▶ Highly cost effective
- ▶ Compact in size

Applications:

- ▶ Switchgear
- ▶ Distribution system
- ▶ Generator sets
- ▶ Control Panels
- ▶ Control Devices
- ▶ Overload protection

Input Specifications


Rated Primary Current	200A to 1600A
Rated Secondary Output	5A/1A(Consult factory)

Technical Specifications


Rated Burden	1.5 VA, 2.5 VA, 5 VA, 10 VA, and 15 VA
Class of Accuracy	1 and 0.5, 0.25
Over Load Withstand	1.2 times rated current continuously
Rated Dynamic Current	2.55x Ith
Short Circuit Thermal Current Ith	60xIn (rated primary current for 1 sec)
Insulation Class	Class E
Max. Operating Voltage	720 V maximum
Insulation test voltage	3KV AC for 1 minute
Compliance Standard	IEC61869-2

Environmental Specification

Operating Temperature	-20C to 70C
Storage Temperature	0 to 55C
Humidity	<95% RH (non-condensing)

Dimensions

Bus Bar Dimension : 63 x 10, Ø44

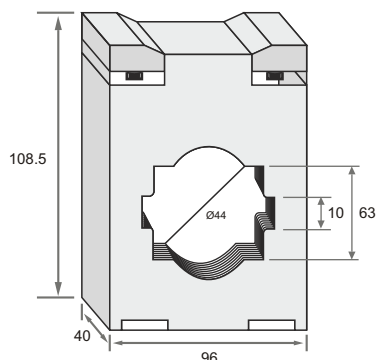

Outer Dimension : 96 (W) x 108.5 (H) x 40 (D)

Ordering Information

Primary Current	Class 1		Class 0.5	
	Burden (VA)	Ordering Code	Burden (VA)	Ordering Code
200	1.5	63104460.01	1.5	63104460.49
	2.5	63104460.02	2.5	63104460.50
250	1.5	63104460.03	1.5	63104460.51
	2.5	63104460.04	2.5	63104460.52
300	1.5	63104460.05	1.5	63104460.53
	2.5	63104460.06	2.5	63104460.54
	5	63104460.07	5	63104460.55
400	1.5	63104460.08	1.5	63104460.56
	2.5	63104460.09	2.5	63104460.57
	5	63104460.10	5	63104460.58
	10	63104460.11	5	63104460.58
500	1.5	63104460.12		
	2.5	63104460.13	2.5	63104460.60
	5	63104460.14	5	63104460.61
	10	63104460.15	5	63104460.61
600	15	63104460.16	15	63104460.63
	2.5	63104460.17	2.5	63104460.64
	5	63104460.18	5	63104460.65
	10	63104460.19	5	63104460.65
	15	63104460.20	15	63104460.67
750	2.5	63104460.21	2.5	63104460.68
	5	63104460.22	5	63104460.69
	10	63104460.23	10	63104460.70
	15	63104460.24	10	63104460.70
	2.5	63104460.25	2.5	63104460.72
800	5	63104460.26	5	63104460.73
	10	63104460.27	10	63104460.74
	15	63104460.28	10	63104460.74
	5	63104460.30	5	63104460.76
1000	10	63104460.31	10	63104460.77
	15	63104460.32	10	63104460.77
	30	63104460.33	10	63104460.77
	5	63104460.34	5	63104460.80
1200	10	63104460.35	10	63104460.81
	15	63104460.36	15	63104460.82
	30	63104460.37	15	63104460.82
	5	63104460.38	5	63104460.84
1250	10	63104460.39	10	63104460.85
	15	63104460.40	15	63104460.86
	30	63104460.41	15	63104460.86
	5	63104460.42	5	63104460.88
1500	10	63104460.43	10	63104460.89
	15	63104460.43	15	63104460.90
	30	63104460.44	15	63104460.90
	5	63104460.45	5	63104460.92
1600	10	63104460.46	10	63104460.93
	15	63104460.47	15	63104460.94
	30	63104460.48	15	63104460.94