

VIPS LI / LAM (Display voltage & Current Lamp Indicator)




22.5mm Voltage / Current Indicator Have Aesthetic Compact, Rigid Construction Design

To Ensure Reliable Trouble Free Performance

Features:

- ▶ Compact Size
- ▶ Under Voltage Indicator For Voltage Indicator
- ▶ 100A Direct Operation For Current Indicator

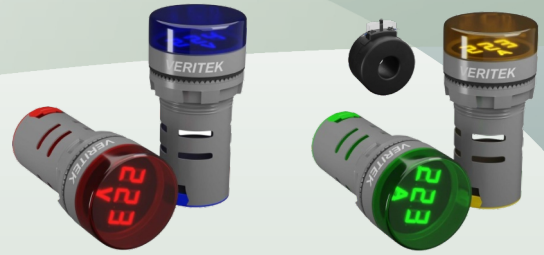

Specifications

Service Temperature

Storage - 25 °C to +70 °C

Operation - 25 °C to +55 °C

Voltage Lamp Indicator

Input : 50 - 300 VAC

Display : Seven Segment LED Display 2.5 mm Height

Accuracy : Class 1.0 $\pm$ 2 Digits

Under Voltage Indication : The Reading Flashes When Input Voltage Below 180 VAC



Current Lamp Indicator

Aux : 230 VAC - (+10%-25%)

Input : 100 Amps CT Primary

Display : Seven Segment LED Display 2.5 mm Height

Accuracy : Class 1.0 $\pm$ 2 Digits



Dielectric Strength

Ingress Protection

Terminal capacity

2.5kV for 1 minute


IP 30 for terminals, IP65 (Top surface of indicators)

Screw Clamp Terminals

Min: 1 x 0.5 Sqmm

Max: 2 x 1.5 Sqmm, 1x2.5 Sqmm

Dimension

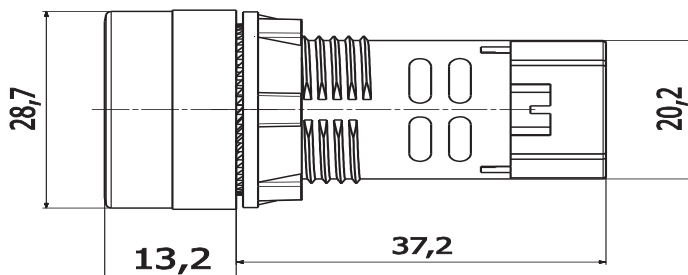

Dielectric Strength
Ingress Protection
Terminal capacity

2.5kV for 1 minute
IP 30 for terminals, IP65 (Top surface of indicators)
Screw Clamp Terminals
Min: 1 x 0.5 Sqmm
Max: 2 x 1.5 Sqmm, 1 x 2.5 Sqmm

Dimension

